

The Security Company **IDTECK**



Management
Software




Facial
Recognition



Fingerprint
Recognition



RFID & Card



Access
Controller



Integrated
Video
Surveillance

Experts in Security

- Since 1989 IDTECK has had its products implemented worldwide
- A professional security company that provides a Total Security Solution, On demand Solutions, and High Level of Security with continuous technological innovation

Total Security Solutions Provider

- Access Control Systems (ID Badging, Visitor Management, Elevator Control)
- Video Surveillance System Integration, with Milestone & Samsung Surveillance Systems. Customization Available with 3rd party DVR's or NVR's
- Fire Detection System
- Alarm Detection System
- BAS(Building Automation System)
- BMS(Building Management System)

Products

- RFID Readers & Cards (125Khz / 13.56Mhz / 2.45Ghz)
- Biometric Readers (Fingerprint and Face recognition)
- Control Panels (1~32 doors per access control panels)
- Standalone (Network Control Panels)
- Management Software
- DVR, NVR, IP Camera

On demand Solutions

- Quick & Proper Customization
- Protocol/SDK Support
- Powerful Technical Support
- OEM/ODM Opportunity
- Seamless Integration and Inter-operability
- System Integration Specialists Available
- Bidding Participation
- Flexible Warranty Period



High Level of Security

- Encryption on Communication Packet (AES128)
- Biometrics (Fingerprint/Facial Recognition) Smart Card stored Technology
- PIV/FIPS201 certified for US Homeland and Security
- IDTECK Smart Card credential format Technology

Total Security Solutions Provider

- *Strengthen Security with Various Management Configurations*
- *Real-Time Management, Monitor and Control at Remote Site*
- *Offers Various User Defined System Settings for Flexible and Effective Management*
- *Seamless Integration with Video Surveillance, Alarm, Fire Alarm, BAS, BMS and Other Systems*
- *Fault Tolerant System Applied*

❖ Total Security System Applications




PRODUCT OVERVIEW



Management
Software



IDTECK Enterprise

Powerful Total Security Solution
Included ID Badging, Visitor Management, Video
Surveillance, Elevator Control

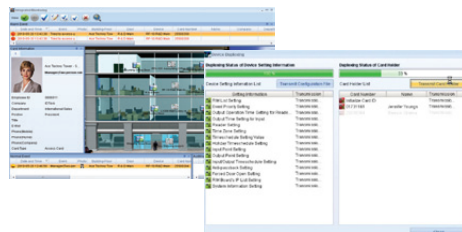

IDTECK Standard

Professional Security Solution
Access Control & Basic T&A Software

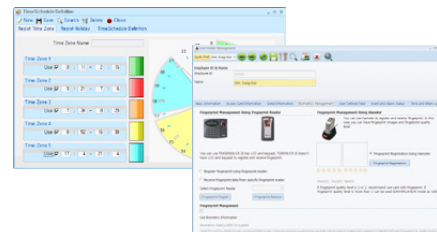

Access Control
Panel

iMDC

Enhanced Security
Up to 32 doors access control
panel



iEDC

Embedded Web Server based
Up to 8 doors access control panel



iFDC

Embedded Web Server · PoE
Up to 4 doors access control
panel



Standalone/
Network Controller

XO1000 Series

Wireless GPRS
Embedded Web server



MAC1000 Series

Embedded Web server
Visual Image / Video of
Access Status



LX007 Series

TCP/IP communication
RF/ PIN / Fingerprint/
Network Identification



FINGER007 Series

Affordable·Stability·Security
RF/ PIN / Fingerprint/
Network Identification



Reader & Card

LX006 Series

Fingerprint / RF
Identification



FINGER006 Series

Fingerprint / RF / PIN
Identification



FGR006 Series

Fingerprint / RF
Identification



Proximity Reader Series


125KHZ[PSK Format] Reader
Series



Additional Modules for IDTECK Standard Software


Time Pro

Professional Time & Attendance management software supports various work time rules




ID Badging Pro

ID Badge Graphic Design Printing Software




Visitor Management Pro

Visitor Access and Record Management




View Pro

Access Control + Video Surveillance



iTDC

Advance · Affordable · Stability
Up to 4 doors access control panel




iTDC

Affordable · Stability
Up to 2 doors access control panel




iCON100

Affordable · Stability
Single door access control panel



ELEVATOR384

Elevator Access Control Panel



LX505 Series

TCP/IP communication
RF/PIN/ Network Identification



505R Series

Affordable · Stability · Security
RF/PIN/ Network Identification



Vandal Resistant Standalone Series

Suitable for extremely harsh Environments



100R / RFL200 Series

Easy Install, Affordable



Smart Card Reader Series

13.56MHZ Card Reader Series



Vandal Resistant Reader Series

Suitable for extremely harsh Environments



Vehicle Identification Long Range Reader & Standalone

2.45 GHz, Read Range up to 15m




IDC80(125 KHz) Card
ISC80(13.56 MHz) Card
IDA245(2.45 GHz) Card




Powerful Total Security Solution Fault -Tolerant System

IDTECK Enterprise

- Providing Total solution
 - Access control
 - Visitor Management
 - Elevator Control
 - ID Badging
 - Video Surveillance
 - Basic Time & Attendance
- Multi-site Management
- Supports Fault Tolerant System for Stable Performance without System Feature
- Enhanced System Security features
- User Defined Integrated Monitoring
- Seamless Integrations with Video Surveillance, Fire Alarm, Alarm, BAS, BMS, and other Systems
- Compatible Controllers : iMDC, iEDC, iFDC

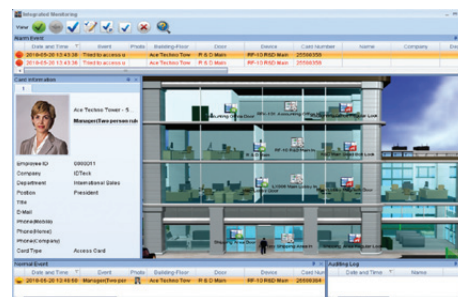

Integrated Monitoring

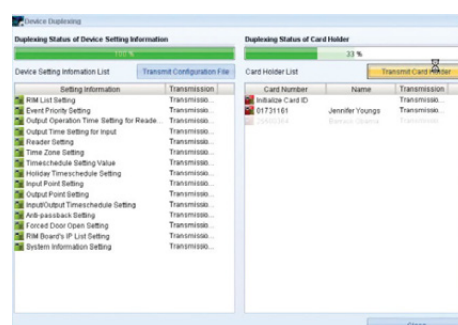

Fault Tolerant System Applied


Professional Security Solution Access Control & Basic Time & Attendance Software

IDTECK Standard

- Additional Modules available for expansion function
 - Professional Time & Attendance - Time Pro
 - ID Badging - ID Badging Pro
 - Visitor Management - Visitor Management Pro
 - Video Surveillance - View Pro
- Multi-site management via LAN/WAN communication
- Maximized System Performance with Distributed System Environment [3-tier]
- Additional Modules available for expansion function



Time Schedule

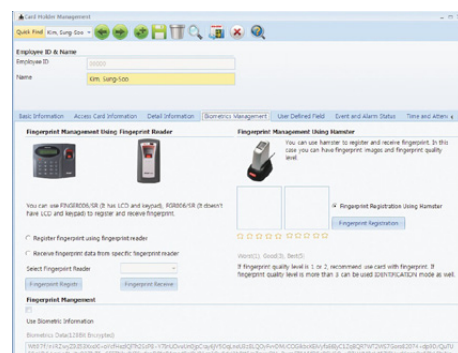


Biometric Information
Management

* Compatible Controllers: iTDC Series, iCON100, LX007 Series, FINGER007 Series, LX505 Series, 505R Series, MAC1000 Series, MAC2000 Series

Additional Modules for IDTECK Standard Software

Time Pro


- Professional Time & Attendance management software supports various work time rules
- Various T&A and User Defined Reports (Excel/Text/PDF)
- User Configurable Multi-Shift Management (Double shift / Triple shift / User defined)
- Additional modules available or as an independent software

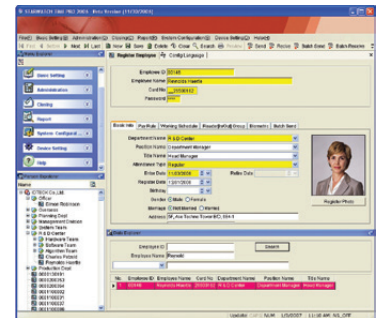

User Defined Work Schedule Settings

ID Badging Pro


- ID Badge Graphic Design printing Software
- Simple and Intuitive Card Design and Creation
- Integrations with Various Devices for Convenient Card Issuance

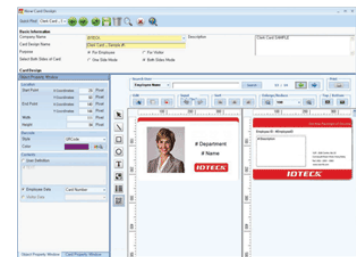

ID Badging Design & Print

Visitor Management Pro


- Access control for visitor management software
- Visitor Access and Record Management
- Web-Based Visitor Pre- Registration
- Various Notification and Reporting Capabilities

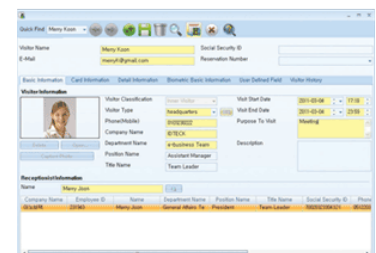

Visitor Access & Record Management

View Pro

- Integrated with video surveillance (DVR integration) management software
- Allows real-time confirmation of video using the camera list and icons
- Automatic DVR search function
- Automatic pop-up notification with video image according to event configuration

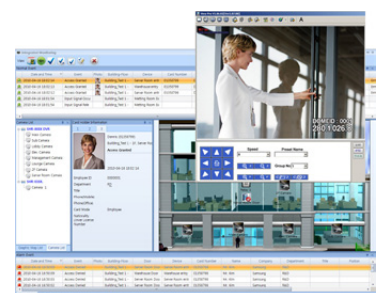

Integrated with video surveillance

Enhanced Security


Up to **32** doors access control panel

iMDC


- Enhanced Security as iMDC-main and iMDC-RIM are separated
 - Encrypted Data Transmission (3DES) between iMDC-MAIN and Communication Server
- Dependable Fault Tolerant Systems for faultless operation
- Integrations with Video Surveillance, Alarm, Fire Alarm, BAS, BMS and Other Security Systems
- 4-Status Input Check (On/Off/Short/Cut)
- Up to 32 Readers, 128 Inputs, 128 Outputs
- Local / Zone / Area / Global / Timed / Soft Anti-Passback
- Compatible Software : IDTECK Enterprise
- Up to 200,000 users
- Ethernet /RS485 Communication

iMDC-RIM(Remote Interface Module)

- Connect up to 16 iMDC-RIM per iMDC-Main
- 2 Readers , 8 Inputs, 8 Outputs
- Ethernet /RS485 Communication



iMDC-Main



iMDC-RIM

Embedded Web Server based


Up to **8** doors access control panel

iEDC


- iEDC(2doors) + ERIO Expansion board
- Embedded Web Server
 - Various configuration setting via web
 - Operation without installation of Management Software
- PoE (Power over Ethernet) feature
- Supports Expansion Input Board (UIM) / Expansion Output Board (UOM)
- 4 Status Input Check (On/Off/Short/Cut)
- Compatible Software: IDTECK Enterprise
- Up to 100,000 users
- Ethernet /RS485 /RS232 Communication

ERIO (Expansion reader /input/output board)

- Required for controlling 5~8 doors
- 4 readers, 8 Input, 8 Outputs
- Supports Expansion board iFDC (Required for controlling 5~8 doors)



iEDC
(iFDC + ERIO)




ERIO

Embedded Web Server · PoE based

Up to 4 doors access control panel

iFDC

- Embedded Web Server
 - Various configuration setting via web
 - Operation without installation of Management Software
- PoE (Power over Ethernet) feature
- Supports Expansion board ERI0 (Required for controlling 5~8 doors)
- Supports Expansion Input Board (UIM) / Expansion Output Board (UOM)
- Compatible Software: IDTECK Enterprise
- Up to 100,000 users
- Ethernet /RS485 /RS232 Communication



iFDC

UIM (Expansion Input Board)


- 16 Inputs, 2 outputs
- up to 4 UIM per / iFDC

UOM (Expansion Output Board)

- 16 outputs 2 Inputs
- up to 4 UOM per / iFDC



UIM




UOM

Advance · Affordable · Stability

Up to 4 doors access control panel

iTDC


- iTDC(2doors) + EI088 Expansion board
- Advanced Time Schedule Setting
- Duress Mode / 2 Men Operation
- ARM/ DISARM Function
- Supports Expansion Board EI088
- Integrations with Video Surveillance, Alarm, Fire Alarm, BAS, BMS and Other Security Systems
- Door opening Time Configurable per ID
- Compatible Software: IDTECK Standard
- Up to 50,000 users
- RS232 / RS422 / RS485 / Ethernet (Optional) Communication



iTDC
(iTDC+EI088)

EI088 (Expansion Board)

- 8 Inputs, 8 Outputs
- Required for Controlling 3~4 Doors




EI088

Affordable · Stability

Up to 2 doors access control panel

iTDC

- Advanced Time Schedule Setting
- Duress Mode / 2 Men Operation
- ARM/ DISARM Function
- Supports Expansion Board EI088
- Integrations with Video Surveillance, Alarm, Fire Alarm, BAS, BMS and Other Security Systems
- Door opening Time Configurable per ID
- Compatible Software: IDTECK Standard
- Up to 50,000 Users
- RS232 / RS422 / RS485 / Ethernet (Optional) Communication

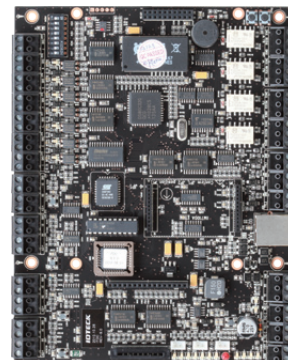


iTDC

Affordable · Stability

Single door access control panel

iCON100

- Alerts when door opening time exceeds and forced door open
- 3 Status Input check (On/Off/Cut)
- Anti-Passback Function
- Compatible Software: IDTECK Standard
- Up to 50,000 Users
- RS232 / RS422 / RS485 / Ethernet (Optional) Communication




iCON100

Elevator

Access Control Panel

ELEVATOR384

- Controls up to 384 Floors
(12 Floors per Controller, Expandable up to 32 Controllers per Loop)
- Supports up to 4 Key Panels per each Elevator
- Time Schedule Setting by Floor or ID
- Allows Integration with iTDC Access Control Panel
- Compatible Software: IDTECK Standard, Elevator Pro
- Up to 50,000 Users
- RS232 / RS422 / RS485 / Ethernet (Optional) Communication



ELEVATOR384

Wireless GPRS & Embedded Web server Fingerprint Identification Standalone Controller

XO1000

- Wireless GPRS, WiFi
- Embedded Web Server
 - Various configuration setting via web
 - Operation without installation of Management Software
- PoE (Power over Ethernet)
- USB available
- DVR Interface
- Video Image with built in camera
- Operation Mode (RF, Fingerprint, RF+Fingerprint)
- Fingerprint Registration : 25,000 Users
- Users / Event Buffers : 100,000Users / 500,000 Events



XO1000

Embedded Web server Fingerprint Identification Standalone Controller

MAC1000

- Embedded Web Server
 - Various configuration setting via web
 - Operation without installation of Management Software
- WiFi supportable
- Visual Image / Video of Access Status
- USB available
- PoE (Power over Ethernet)
- Videophone interface
- Operation Mode (RF, Fingerprint, RF+Fingerprint)
- Fingerprint Registration : 25,000 Users
- Users / Event Buffers : 100,000Users / 500,000 Events



MAC1000

Versatile Interface Fingerprint Identification Standalone Controller (RF/ PIN / Fingerprint/ Network)

LX007

- Graphic LCD Applied
- Multi language display and voice support
- 12 Function Keys for Various T&A Applications
- 3-Status Input Check (On/Off/Cut)
- Allows Registration of 10 Administrator Using the Fingerprint
- RS232, RS485, TCP/IP communication
- Users / Event Buffers : 20,000Users / 20,000 Events



LX007

Multi Layered Security

Fingerprint Identification Standalone Controller
(RF/PIN / Fingerprint / Network)

Finger007

- Multi language display support
- Time Schedule Setting
- Identification is made using only the fingerprint without using any cards or keypads.
- Anti-Pass Back Mode
- RS232, RS422, RS485, TCP/IP(Optional) communication
- Users / Event Buffers : 50,000Users / 50,000 Events



Finger007

Comfortable & Easy Interface

Proximity Standalone Controller (RF/PIN/ Network)

LX505

- Graphic LCD Applied
- Multi language display and voice support
- 12 Function Keys for Various T&A Applications
- 3-Status Input Check (On/Off/Cut)
- RS232, RS485, TCP/IP communication
- Users / Event Buffers : 20,000Users / 20,000 Events



LX505

Affordable · Stability · Security

Proximity Standalone Reader (RF/PIN/ Network)

505R

- Multi language display support
- Time Schedule Setting
- Operation mode selectable according to user environment
- Anti-Pass Back Mode
- RS232 / RS422 communication



505R

Vandal Resistant Proximity Standalone Controller

100RV/RFL200V

- Illuminated LED touch keypad (100RV)
- Suitable for extremely harsh environments (IP-68, Full epoxy potted, waterproof, weatherproof)
- Unique anti-tamper screw protection
- One-piece design "Rugged, Compact and Vandal Resistant"
- Material: Polycarbonate / Aluminum Die Casting
- RS232 Communication (100RV)
- Users : 512 Users



100RV



RFL200V

Affordable · Stability Proximity Standalone Controller

100R

- Access Control and basic Time & Attendance together in one device
- All I/Os and Operation Time Programmable by Keypad
- Keypad Lock by Try-out Error Alarm Function
- Temper switch (2ea)
- Chime Bell Output
- RS232 Communication
- Users : 512 Users



100R

Easy Installation Proximity Standalone Controller

RFL200/RFL200C

- Up to 512 Users
- Door Lock Type Selectable
 - Power Fail Safe/Power Fail Secure
- Available for Outdoor Installation
 - Epoxy Molding / Outdoor capacity : IP66
- Device Information and Operation Status Display via Nine LED and Buzzer
- RFL200/RFL200C - 512 users



RFL200

RFL200C

Versatile Interface Fingerprint Reader

LX006

- Identification Mode: RF, Fingerprint, RF+Fingerprint
- Operation Mode (RF, Fingerprint, RF+Fingerprint) Switches Over Automatically According to the Time Schedule Configured on the Controller
- Voice Guide Output and Multi-Language Support
- Supervisory Signal Transmission for Device Operation Status Check
- Wiegand, RS232, RS422, RS485, TCP/IP Communication
- **LX006** : 125KHz (PSK Format/IDC Type) Proximity RF Card / Fingerprint Recognition
- **LX006SR** : 13.56MHz (MIFARE, ISO14443 Type A Compatible) SMART Card Fingerprint Recognition



LX006

Multi Layered Security Fingerprint Reader

Finger006

- Time Display on LCD
- Wiegand, RS232, RS422, RS485, TCP/IP (Optional) Communication
- **FINGER006** : 125KHz(PSK Format/IDC Type) Proximity RF Card or PIN / Password / Fingerprint Recognition
- **IP-FINGER006** : 125KHz(ASK [EM]Format) Proximity RF Card or PIN / Password / Fingerprint Recognition
- **FINGER006SR** : 13.56MHz(MIFARE, ISO14443 Type A Compatible) SMART Card or PIN / Password Fingerprint Recognition
- **FINGER006SRB** : Fingerprint Stored 13.56MHz MIFARE SMART Card or PIN / Password / Fingerprint Recognition



Finger006

High Compatibility Fingerprint Reader

FGR006

- Supervisory Signal Transmission for Device Operation Status Check
- Wiegand, RS232, RS422, RS485, TCP/IP (Optional) Communication
- **FGR006** : 125KHz (PSK Format/IDC Type) Proximity RF Card / Fingerprint Recognition
- **IP-FGR006** : 125KHz (ASK [EM] Format) Proximity RF Card / Fingerprint Recognition
- **FGR006SR** : 13.56MHz (MIFARE, ISO14443 Type A Compatible) SMART Card / Fingerprint Recognition
- **FGR006SRB** : Fingerprint Stored 13.56MHz MIFARE SMART Card / Fingerprint Recognition



FGR006

Easy Installation / Lifetime Warranty / Weatherproofed

RF TINY/RF10/RF20/RF30

- Lifetime Warranty
- Easy install on door frame(RF10 / RF TINY)
- Wall mount (RF20, RF30)
- Read Range
 - **RF Tiny / RF10 / RF20**
IDC80 : Up to 4 inches (10cm)
IDC170 : Up to 4 inches (10cm)
 - **RF30**
IDC80 / IDC170 Up to 12 inches (30cm)



PROX10/ PROX10H

- **PROX10** : 125KHz Proximity Reader [IDC& Indala format]
- **PROX10H** : 125KHz Proximity Reader [IDC, Indala & HID Format]
- Life Time Warranty
- Easy Install on door Frame
- Read Range
 - **IDC80** : Up to 4 inches (10cm)
 - **IDC170** : Up to 4 inches (10cm)



PROX10/PROX10H

RFK101

- 12 Numeric Keypads with Back Lighting
- Wall Mount (US, EU, Asian Gang Box Size)
- Reverse Polarity Protection
- Read Range : IDC80 / IDC170 Up to 4 inch (10cm)
- Operation Mode (RF, PIN, RF+PIN)



RFK101

RFK505

- Fast Identification Speed
- User Defined format Available
- 16 Numeric Keypads with Back Lighting
- Wall Mount (US, EU, Asian Gang Box Size)
- Read Range : IDC80 / IDC170 Up to 4 inch (10cm)



RFK505

High Compatibility / Strengthened Security / Various Applications

- | | |
|---------------------|---|
| SR Series | <ul style="list-style-type: none"> - High Compatible with ISO14443, ISO18092(NFC), Mifareplus, Felica Compatible - Identifies UID 7byte / 4byte - High Compatibility with Existing Smart Card - Can be used as Transit Card, E-Commerce, Student ID Card, Bank Credit Card and etc. |
| SRS Series | <ul style="list-style-type: none"> - Security is Strengthened as Access Key Encrypted by the User or IDTECK is Used in Writing the ID Number on Certain Sector or Block |
| SRB Series | <ul style="list-style-type: none"> - Security is Maximized as the Fingerprint is Stored in the Card, not in the Device. -> In Case the Card is Lost, there is no Need to Worry as the Fingerprint Stored in the SMART Card is Only Used to Identify the User and Password |
| SR RW Series | <ul style="list-style-type: none"> - Read and Write on Card According to User's Preference - Various Applications such as Access Control, Time & Attendance, Debt Meal, Vehicle Management and Other Applications with One Card |

SR10/SR30 Series

- 3 Array LED Indicators (Red and Green) and Beeper
- Identifies UID 7byte / 4byte
- **SR10** Series - Easy install on door frame
- **SR30** Series- Wall Mount (US, EU, Asian Gang Box Size)



SR10
SR10S
SR10B
SR10RW



SR30
SR30S
SR30B
SR30RW

SRK505/SRK101 Series

- Wall Mount (US, EU, Asian Gang Box Size)
- Tamper Switch (2 EA)
- **SRK505** - Time Display on LCD
- Supervisory Signal Transmission for Device Operation Status Check



SRK505



SRK101
SRK101S
SRK101B
SRK101RW

Suitable for extremely harsh Environments

RFK101V/SRK101V

- **RFK101V** - 125KHz Proximity Reader
- **SRK101V** - 13.56MHz Smart Card Reader
- Illuminated **LED touch keypad**
- Suitable for extremely harsh environments(IP-68)
- **Unique anti-tamper screw** protection
- One-piece design "Rugged, Compact and Vandal Resistant"
- Material: Polycarbonate / Aluminum Die Casting
- Read Range
 - **RFK101V** - IDC80 / IDC170 Up to 3inch (7cm)
 - **SRK101V** - ISC80 Up to 3inch (7cm)



RFK101V
SRK101V

RF10V/SR10V/RF20V/SR20V

- **RF10V, RF20V** - 125KHz Proximity Reader
- **SR10V, SR20V** - 13.56MHz Smart Card Reader
- Suitable for extremely harsh environments (IP-68)
- **Unique anti-tamper screw** protection
- **RF10V, SR10V** - Easy install on door frame
- **SR20V, SR20V** - Wall Mount (US, EU, Asian Gang Box Size)
- Material: Polycarbonate / Aluminum Die Casting




RF10V
SR10V



RF20V
SR20V



Weatherproof

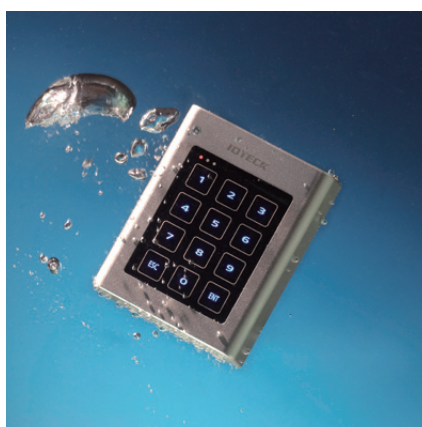

Waterproof



Vandal Resistant

VEHICLE IDENTIFICATION READER & CARD

2.45GHz Long Range Reader

(Up to 15m Reading Range - Selectable in the Field)

Neo RF245 / Neo RF245S

- Various Reading Range Selectable in the Field
2m(6.5ft)/3m(10ft)/5m(16ft)/10m(33ft)/15m(50ft)
- Utilized Various Applications (Vehicle Control / Logistics Tracking / Personnel Tracking / Asset Tracking)
- Multiple Card/Tag Identification (Identifies 30 cards per second)
- 90° One-directional Antenna for Long Range Identification (360° Omni-directional Antenna Selectable)
- By using the secured algorithms between the reader and the card, it offers encrypted card ID communication
- Neo RF245 - Long range reader
- Neo RF245S - Long range standalone reader
(Users / Event Buffers : 5,000Users / 8,000 Events)



Neo RF245 / Neo RF245S

2.45GHz Long Range Card

IDA 245


- Compatible with RF245 Readers
- User programmable Site code, ID number
- Attachable on V behind windshield
- Lifetime active tags with replaceable battery CR2025
- IDA245H2 - Tag for a car with windshield metal coated for ESD protection




IDA245

Card Holder


Long Range System Applications




Long Range
Access Control (Hands-Free)

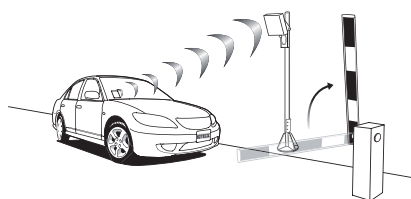

Parking Control
(Vehicle access control)

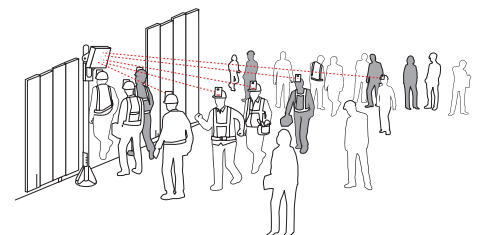


Time & Attendance on Construction Site

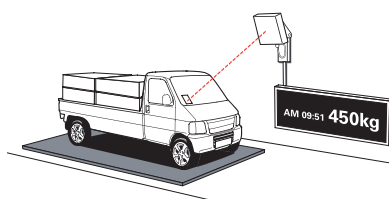

Logistics/Fleet Management
(Weighing solution)



Asset Tracking



Personnel Tracking

Proximity Card & Tag

- **IDC80** - ISO Credit Card Size and Thickness
- Allows for graphic printing on card
- **IDC170** - Clam Shell Proximity Card
- **IDK50** - Keyfob
- **LXK50** - Red color LED Indicators on reading time
- **IMC125** - Easy to attach on Personal Belongings
(MS / Barcode Card, Wallet, PDA, Cell Phone)



IDC80



IDC170



IDK50



LXK50



IMC125

Smart Card & Tag

- **ISC80** - ISO Credit Card Size and Thickness
- Allows for graphic printing on card
- **ISC80S** - IDTECK Credential SRS Series Readers
- **IHC80** - IDC Type 125KHz + Mifare 13.56 MHz Compatible Card
- **ISK50** - Keyfob
- **IMC135** - Easy to attach on Personal Belongings
(MS / Barcode Card, Wallet, PDA, Cell Phone)



ISC80/ISC80S



IHC80



ISK50



IMC135



LXK50



Personal Belongings using IMC125

The Security Company

www.idteck.com



The Security Company

Headquarters : IDTECK Co., Ltd.

5F, Ace Techno Tower Bldg, 468, Gangseo-ro, Gangseo-gu, Seoul, 157-030, Korea

Tel : +82-2-2659-0055 Fax : +82-2-2659-0086

E-mail : webmaster@idteck.com Website : www.idteck.com

North America : IDTECK Global Inc.

4880 W. University Ave. Suite B4 Las Vegas NV 89103

Tel. +1-702-421-2416

Email : sales@idteckglobal.com Website : www.idteckglobal.com